


TELEMARK

High Vacuum Sources




NEW!


Arc Suppression
Emitter for
264/274/294 sources



221/224




244




246

- **ROTATABLE HEARTH IS REMOVABLE FOR EASY CLEANING OR CHANGING OF CRUCIBLES**

- 270° beam deflection (Hidden Filament)
- Proprietary water cooling design means longer crucible life and more consistent evaporation of material
- Rugged, reliable construction
- Designed for ease of use and maintainability
- Permanent magnet for primary beam positioning to provide improved control of evaporation process
- Durable emitter assembly with unique design for increased filament life and simple maintenance
- Plug-in emitter assembly for easy filament replacement
- Side or bottom crucible rotation drive
- Integral rotation feedthrough on models 246/266/276/296 eliminates water to vacuum seal

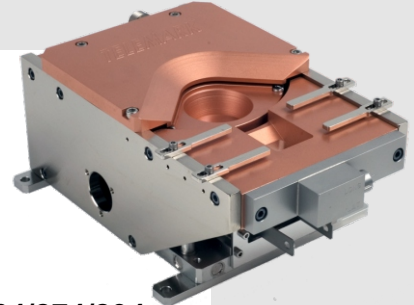

264/274/294

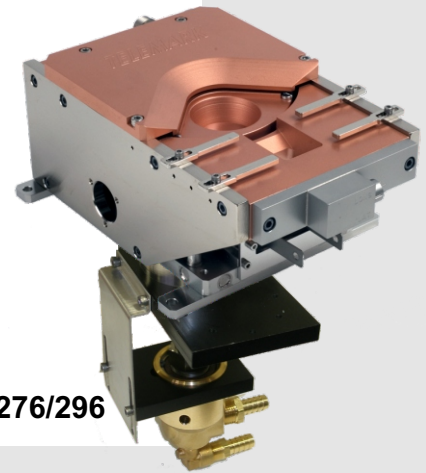

266/276/296

Model 285/286/287/292/295/298 Large Capacity, Multi-Pocket

For applications requiring large evaporation materials inventory (e.g. multiple or thick layers, extended throw distances)

The **Model 285** is available with 12x 25cc.



The **Model 286** is available with 4x 100cc.

The **Model 287** is available with 9x 60cc.

The **Model 292** is available with 6x 160cc.


The **Model 295** Source provides a wide range of crucible sizes including 6x100cc, 16x15cc and a 1486cc trough. Available in 10Kw or 15Kw versions, with Arc-Suppression available as an option.

The **Model 298** has crucibles up to 16x100cc and a 2880cc trough.

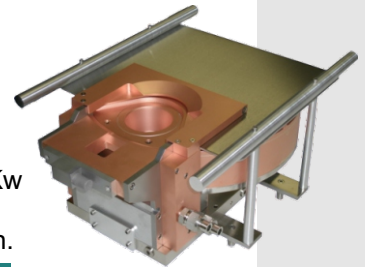

Model 263/293 "Crucible-less" Source

For customers wishing to supply the crucible as part of their mechanical assembly, the **Model 263**(10kW) and **Model 293** (20kW) crucible-less source offers a compact, cost-effective solution. End users can expect long filament life from this versatile source, which can be supplied with optional arc-suppression.




Near UHV Models 249/269/279

The addition of a magnetic fluid rotary feedthrough to our standard source bodies, for crucible rotation and water cooling, allows these sources to be pumped into the -10 Torr range.

Rotatable Multi-Pocket Sources

Pockets	Size	221		224		244/246/249		264/266/269		273/274/ 276/279		294/296		285/286/287/292/295/298	
		Side	Bottom	Side	Bottom	Side	Bottom	Side	Bottom	Side	Bottom	Side	Bottom	Side	Bottom
4	2cc	-05	-06												
4	4cc			-63	-64	-63	-64								
4	7cc					-27	-28	-27	-28	-27	-28				
4	15cc							-01	-02	-01	-02				
4	25cc Shallow							-07	-08	-07	-08				
4	30cc							-19	-20	-19	-20	-19	-20		
4	40cc w/web									-61	-62				
4	40cc w/o web									-45	-46	-44	-45		
4	60cc											-81	-82		
4	2x15cc/2x25 Shallow									-37	-38				
6	4cc					-65	-66								
6	7cc					-05	-06	-05	-06	-05	-06				
6	15cc							-11	-12	-11	-12	-11	-12		
6	25cc Shallow									-17	-18	-17	-18		
6	30cc											-75	-76		
6	40cc									-69***	-70***	-69	-70		
6	100cc (10kW*)													295-51	295-52
6	100cc (15kW*)													295-01	295-02
6	2x7cc/4x15cc							-29	-30						
6	4x4cc/2x15cc							-09	-10						
8	7cc							-13	-14	-13	-14				
8	15cc											-01	-02		
8	25cc Shallow											-07	-08		
9	60cc													287-81	287-82
10	40cc													287-87	287-88
10	40cc(10kW*)													295-71	295-72
12	25cc													285-83	285-84
14	15cc													285-85	285-86
4	100cc													286-51	286-52
12	25cc Shallow													287-73	287-74
15	15cc													287-21	287-22
Trough	190cc							-15	-16						
Trough	275cc									-31	-32				
Trough	440cc											-79	-80		
Trough	1486cc													287-91	287-92
Trough	1512cc													285-87	285-88
6	160cc													292-53	292-54
12	100cc (15kW*)														298-77
16	100cc (10kW*)														298-75




Multi-Pocket



Banana
Pocket



Double
Banana



Trough


Specifications

	221/224	211/218/244/246	264/266/269/273**/274 272**/259/285/286/287	294/296	292/295/298
E-Beam Deflection	270°	270°	270°	270°	270°
Power Rating	3 kW(221), 4 kW(224)*	6 kW*	10 kW*	12 kW	10 kW* / 15 kW*
High Voltage Range	-5 kV to -7 kV	-6 kV to -10 kV	-6 kV to -10 kV	-6 kV to -10 kV	-6 kV to -10 kV
Lateral Coil Resistance	7.5 ohms (224)	7.5 ohms	3.0 ohms	3.0 ohms	3.0 ohms
Long. Coil Resistance	9.5 ohms (224)	9.5 ohms	9.6 ohms	9.6 ohms	9.6 ohms

*Nominal value; actual power rating may vary, depending on customer's process.

** Model 273's power rating is 6 kW, Model 272's power rating is 14 kW


*** Model 273 only



246 on 16" CFF

Sources mounted on CF Flanges

Minimum Flange Size						
	211/218	272/259	221/224	244	264	274
Horizontal (Side Mount)	8" CFF	10" CFF	6" CFF	10" CFF	12" CFF	12" CFF
Vertical (Bottom Mount)	10" CFF	14" CFF	10" CFF	12" CFF	16.5" CFF	16.5" CFF
	246/249	266/269	276/279			
Vertical (Bottom Mount)	12" CFF	16.5" CFF	16.5" CFF			

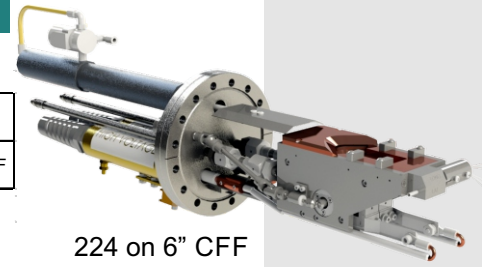

224 on 6" CFF

Crucible Indexers

The Model 396/398 indexers provides either manual or PLC selection of 4 to 30 pockets, and continuous or retrograde (banana pocket) operation. No clutch needed for pocket jams due to automatic motor current sensing. Now with RS-232


- Material names can be displayed on screen
- Speed control 0.25 to 5 rpm.
- Color LCD touch screen user interface.



Crucible Types




Pocket Banana Continuous




Optional In-vacuum In-pocket Switch

In-pocket confirmation switch for Telemark Models 271, 274 and 294

Motor Assembly mounting for 1", 32mm or 2-3/4" CFF

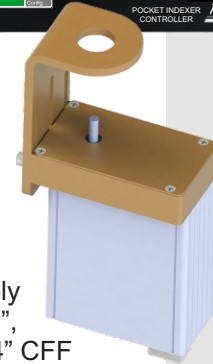

Single Pocket Sources

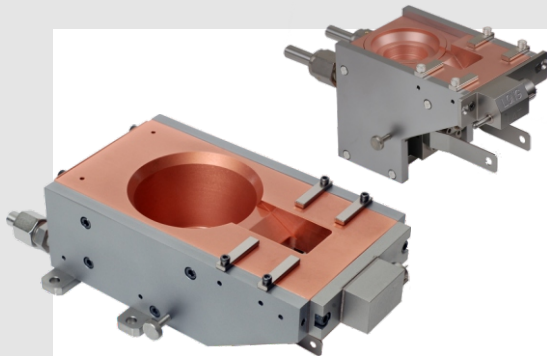

Pocket Size	Standard Sources		UHV Sources	
	Model 211	Model 259/272/257	Model 218	Model 259/257
1.5cc	211-05		218-05	
4cc	211-04		218-04	
7cc	211-07	272-01	218-07	259-01
15cc	211-15	272-02	218-15	259-02
25cc		272-03		259-03
30cc		272-30		259-30
40cc		272-04		259-04
100cc		272-05		259-05
160cc		259-50		259-60
500cc		257-50		257-10

Model 211 and UHV Model 218

High Performance in a Small Package with Crucible Volumes up to 15cc.

- Rated at 6kW* of power when operated at voltages from -6 to -10kV.
- Compact design for use in small research and development systems or wherever space is an important consideration.
- The model 218 UHV uses the same basic components as the standard model 211, with non-interchangeable crucibles and all metal sealing.
- Coils sealed in stainless steel cans are standard.

Model 257/272 and UHV Model 257/259


Large Capacity Source

Performance Proven in High-Power Production Applications

- Available in crucible volumes up to 500cc for long, uninterrupted evaporation.
- Rated at 14kW* when operated at -10kV.
- Capable of evaporating high rates of material such as aluminum. This makes these sources ideal for processes that require a coating layer of one micron or more.
- These sources are also well suited for operation at lower power levels where a large capacity of subliming materials might be required.

* Nominal value; actual power rating may vary, depending on customer's process.

Arc Free Option

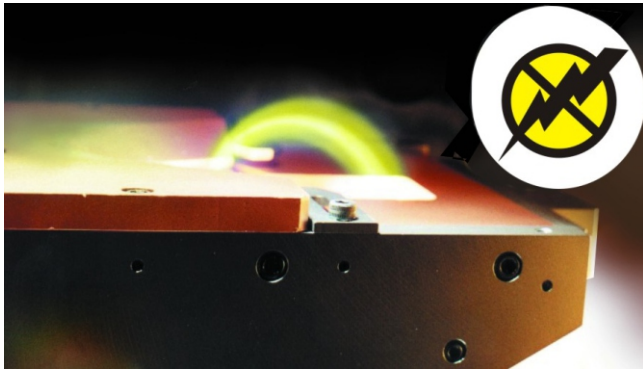

FEATURES:


- Operates in hostile particulate laden environments
- Does not react to ion sources or other discharges
- Operated at pressures $> 5 \times 10^{-3}$
- Available in a wide range of crucible sizes to 6 X 100cc

Source with Arc Free Running @ >5 millitorr in O_2

A source with the Arc Free option is ideal for many applications, such as for optical coating and for ion assisted deposition without a pressure barrier. The reduction in arcing results in improved film quality, improved yields, and fewer arc-related maintenance issues.

Arc Free is available as an optional feature for most Telemark production sources. It has a footprint similar to standard sources, but with the high voltage feedthroughs incorporated into the source. Two separate cooling water lines are required to cool the source body and the high voltage assembly.

Typical Configurations (Others Available)

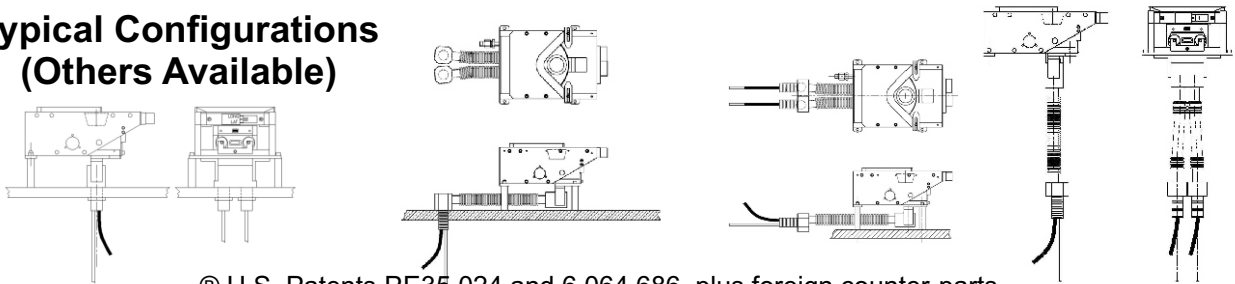

® U.S. Patents PE35,024 and 6,064,686, plus foreign counter-parts



Feedthroughs

Telemark offers a broad range of standard and custom magnetic fluid feedthroughs. Also offered are high voltage, dual water, rotary and octal instrument feedthroughs in the one inch and 32mm o-ring sealed bolt type, and in the $2\frac{3}{4}$ " CF metal seal type. Water flow switches are also available and recommended.

Self-Sealing Cover Plate

An optional self-sealing cover plate is available for applications where cross-contamination between materials is a concern. The front of the cover plate moves up as the crucible indexes to the next pocket. It is actuated by bearings attached to the crucible and is pivoted at the rear of the assembly. When the cover plate is in the closed position, it is in contact with the crucible, thus preventing any migration of the material being evaporated to adjacent pockets. The forward edge of the cover plate is angled to avoid evaporant accumulation.

